ISO 9001 ISO 14001 CE JIS KG

67% post-consumer recycled

No trees were harmed in the making of this wood plank flooring.

micro ceramic enhanced wear layer

NANO Silver

Retail | Contract

Solarbrite®

Luxury Vinyl Flooring Planks

NANOSilver micro ceramic enhanced wear layer

Size : 3mm x 50cm x 50cm
W/L : 0.30 Box Packing : 13 Pcs. (3.25㎡)

Solarbrite®
Luxury Vinyl Flooring

Carpet

5005

5006

Features

Superior Wear Surface with Enhanced Performance

Solarbrite® uses the latest in polymer technology in order to incorporate tiny inorganic beads to increase the durability in the commercial-grade MicroCeramic wear layer. These clear ceramic beads are permanently embedded in the wear layer itself, not in a consumable coating. Its superior performance increases its scratch and scuff-resistance without sacrificing the optical clarity of the high-resolution visuals.

Antimicrobial Protection

Silver has been used for millennia in order to prevent the spread of infection and disease, which explains its popularity in eating utensils and medical tools. Nano-Silver technologically advanced method of applying a non-consumable layer of nanoscopic silver to the surface of the flooring creates a barrier which does not support and actively kills bacteria, viruses and some molds.

Dimensional Stability

Solarbrite® flooring will not warp, shrink or curl during regular use. within normal ranges of temperature. The superior manufacturing process exceeds the expectations of a traditional flooring manufacturer and combined with long experience in the floor covering manufacturing industry helps to identify shortcomings of other products. The ISO 9001:2000 certification ensures the capability of repeating the quality of floor coverings.

67% post-consumer recycled

No trees were harmed in the making of this wood plank flooring.

NANOSilver micro ceramic enhanced wear layer

- wear layer : 0.55mm / 0.30mm
- print pattern film
- middle layer
- balance layer
- backing

Solarbrite®

Luxury Vinyl Flooring

NANO Silver micro ceramic enhanced wear layer

Size : 3mm x 50cm x 50cm

W/L : 0.30 Box Packing : 13 Pcs. (3.25㎡)

Exotic Granite NEW

5001

5002

Polished Concrete NEW

5003

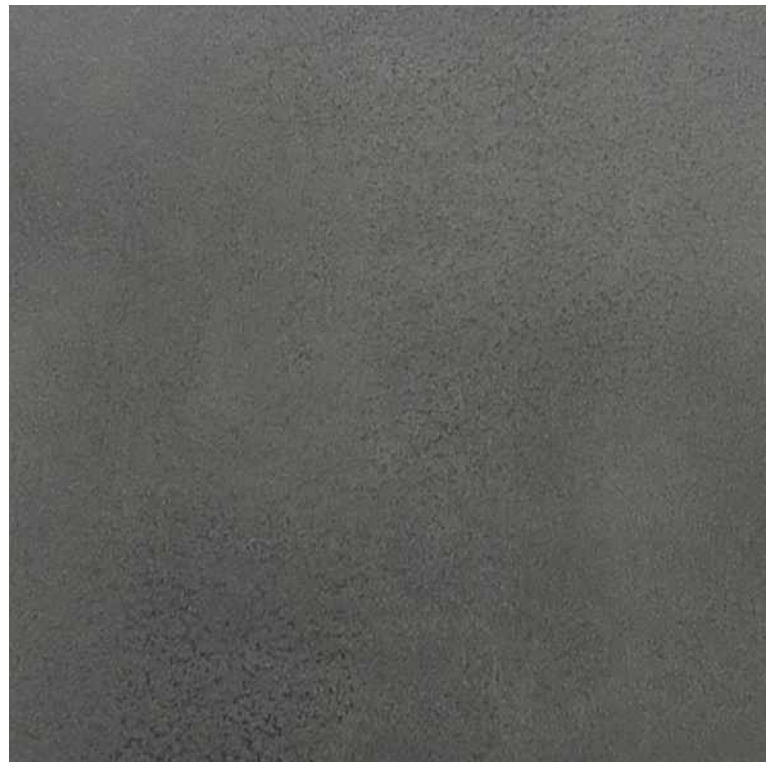

5004

Solarbrite®
Luxury Vinyl Flooring Planks

Natural Wood Plank

NANO Silver

micro ceramic
enhanced wear layer

Dimension : 3.0 x 184 x 950mm , W/L:0.30mm. Box Packing:19 Pcs. / 3.32 m²

3314

3317 NEW

3311

3316

3313

3315

3312

3318 NEW

Solarbrite®
Luxury Vinyl Flooring Planks

Antique Wood Plank

NANO Silver

cmicro ramic
enhanced wear layer

Dimension : 3.0 x 184 x 950mm , W/L:0.30mm. Box Packing:19 Pcs. / 3.32 m²

1742

1712

3170

1371

3202

1763

8500

Solarbrite®
Luxury Vinyl Flooring Planks

Vintage Wood Plank

NANO Silver cmicro ceramic enhanced wear layer

Dimension : 3mm x 7″ x 48″ W/L:0.55mm. Box Packing: 15 Pcs. / 3.25 m²

7485

7484

3194

3260

D23

3302 (2 Strip)

Solarbrite®
Luxury Vinyl Flooring Planks

Vintage Wood Plank

NANO Silver

micro ceramic
enhanced wear layer

Dimension : 3mm x 7″ x 48″ W/L:0.55mm. Box Packing: 15 Pcs. / 3.25 m²

D 22

7003

1713

D 21

7483

7482

7481

TECHNICAL DATA

Specific Data of Solarbrite® Luxury Vinyl Planks

Type & Composition	PVC Decorative. Laminated with Textured Matt Finish
Application	Heavy Commercial. Residential, Households

	Vintage Series	Antique Series	Natural Series	Granite, Concrete & Carpet
Wear Layer Thickness	0.55 mm with Nano Silver	0.30 mm with Nano Silver		0.30 mm with Nano Silver
Surface Treatment	(Antibacterial) * Micro Ceramic	(Antibacterial) * Micro Ceramic		(Antibacterial) * Micro Ceramic
Total Thickness	3.0mm	3.0mm		3.0mm
Plank Size	7"X48"	184 mm X 950 mm		500 mm X 500 mm
Packing / Box	15 PCS /Box (3.25m2)	19 PCS /Box (3.32m2)		13 PCS /Box (3.25m2)

Installation — Glue Down

The Solarbrite® ***Flooring Planks*** meet the requirements of EN 649.

Fire rating	EN13501-1	B_{fl}-S1
Wear resistance (group)	EN 660-1	Group T
Slip resistance	BS 7976-2	Pendulum Test : Low Rz Surface Roughness : Moderate
Residual indentation	EN 433	≤ 0.10 mm
Color fastness	ISO 105402	≥ 6
Dimensional stability	EN 434	≤ 0.25%
Flexibility	EN 435	No crack was found
Electrical behavior	EN 1061	Pass

Actual Production Shade may vary from sample chips

Distributed by

www.sbproducts.in